

# AZURE

lighting solutions



## Visio Outdoor Spot Light



CASAMBI



RGB




RGBW



Tunable White

SYDNEY  
AUSTRALIA

[WWW.AZURELIGHTINGSOLUTIONS.COM](http://WWW.AZURELIGHTINGSOLUTIONS.COM)

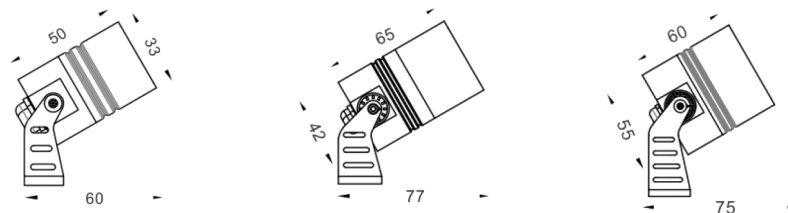


### Product Specifications

Product Name:	Visio.33	Visio.42	Visio.55
Power - Single Colour:	1-2W	3-4W	Up to 4-6W
Power - RGB,RGBW,TW:	-	2W	-
Total luminous flux:	Up to 110lm	Up to 280lm	Up to 480lm
Beam Angle COB - Single Colour:	-	15°,24°,36°,60°	15°,24°,36°,60°
Beam Angle SMD - Single Colour:	5°,8°,10°,12°,20°,25°,30°,40°,45°,60°		
Beam Angle SMD - RGB, RGBW, TW:	-	25°,40°,60°	-

### General Specifications

Fixture Material:	Aluminium
Finish:	White, Black, Custom
Glass:	4mm Tempered Glass
Mounting:	Surface, Spike, Tree
LED Type:	COB and SMD
Binning:	3 Step MacAdam
Correlated Colour Temperature	2700K, 3000K, 4000K, 6000K, RGB,RGBW,Tunable White, Custom
Colour Rendering Index:	>90
R9 Value:	>50
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	24VDC, 220-240VAC 50-60Hz
Control Options:	Non Dim, Phase Dim, 0-10V, DALI, DMX512 , Casambi
Protection Class:	Class I, Class III
Lumen Maintenance:	L80 B10 60,000 Hours
IP Rating:	IP66
IK Rating:	IK07
Warranty:	5 Years

### Accessories

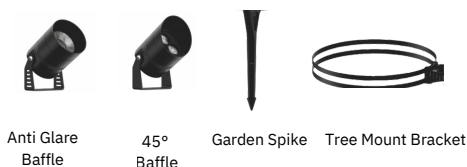

Anti Glare  
Baffle




45°  
Baffle

Garden Spike

Tree Mount Bracket

Lumen values are based on CRI90 at CCT 3000K

All product specifications and data are subject to change without notice



### Product Specifications

Product Name:	Visio.69	Visio.85	Visio.108
Power - Single Colour:	8-10W	10-15W	Up to 18-24W
Power - RGB,RGBW,TW:	6-12W	10-15W	15-24W
Total luminous flux:	Up to 900lm	Up to 1350lm	Up to 2160lm
Beam Angle COB - Single Colour:	15°,24°,36°,60°		
Beam Angle SMD - Single Colour:	5°,8°,10°,12°,20°,25°,30°,40°,45°,60°		
Beam Angle SMD - RGB, RGBW, TW:	25°,40°,60°		

### General Specifications

Fixture Material:	Aluminium
Finish:	White, Black, Custom
Diffuser:	4mm Toughened Glass. - Optional ( Honeycomb Louver, Diffused Glass)
Mounting:	Surface, Spike,Tree
LED Type:	COB and SMD
Binning:	3 Step MacAdam
Correlated Colour Temperature	2700K, 3000K, 4000K, 6000K, RGB,RGBW,Tunable White, Custom
Colour Rendering Index:	>90
R9 Value:	>50
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	24VDC, 220-240VAC 50-60Hz
Control Options:	Non Dim, Phase Dim, 0-10V, DALI, DMX512 , Casambi
Protection Class:	Class I, Class III
Lumen Maintenance:	L80 B10 60,000 Hours
IP Rating:	IP66
IK Rating:	IK07
Warranty:	5 Years

### Accessories



Anti Glare  
Baffle



45°  
Baffle



Garden Spike



Tree Mount Bracket

Lumen values are based on CRI90 at CCT 3000K

All product specifications and data are subject to change without notice

Colour Rendering Index

The Color Rendering Index (CRI) serves as a metric to gauge how accurately a light source portrays the colors of various objects in a given space. Originally comprised of 8 sample colors, the CRI has expanded to 15 samples to provide a more comprehensive evaluation. Notably, within these samples, R9 to R15 focus on assessing special colors with high chroma. Specifically, R9 evaluates the rendering of red tones, while R15 is dedicated to evaluating the portrayal of skin tones. This extension of color samples, coupled with attention to high-chroma colors, enhances the precision in evaluating a light source's ability to faithfully reproduce a diverse range of colors.


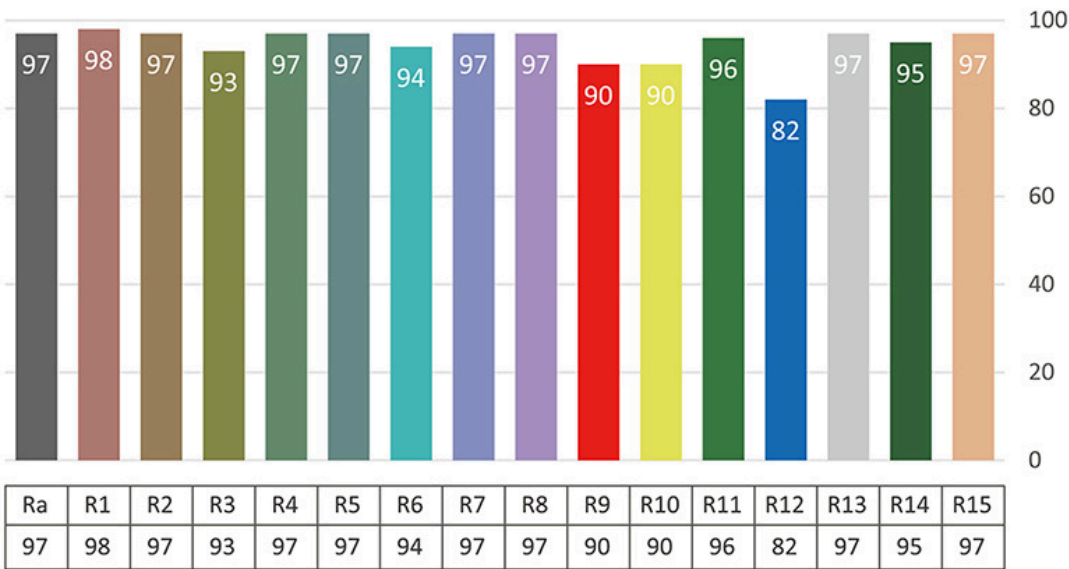


Fig 1 - Colour Rendering Index 4000K, CRI >95

TM30 Rf 92  
Rg 100

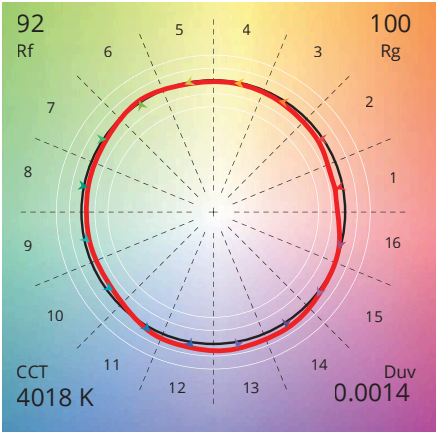

IES TM-30

TM-30 is the Illuminating Engineering Society (IES) Method for Evaluating Light Source Color Rendition, is a standard developed by the IES to assess the color rendering properties of light sources. It provides a comprehensive set of metrics and values that go beyond the traditional color rendering index (CRI), offering a more detailed and accurate understanding of how well a light source renders colors.

Fig 2 -Colour Vector Graphic 4000K, CRI >90